


HyperX Predator PCIe SSD

hyperxgaming.com

Ferocious performance for serious users.

HyperX® Predator PCIe SSD offers large capacities and incredible speeds with both compressible and incompressible data to take your system to the edge. Faster than SATA-based SSDs, it's powered by a Marvell controller and delivers speeds of up to 1400MB/s read and 1000MB/s write for ultra-responsive multitasking and an overall faster system, and it's available in 240GB–960GB capacities. It features a PCIe Gen 2.0 x4 interface for high performance and an M.2 form factor to fit the next generation of desktops with an M.2 PCIe slot. Its HHHL adapter comes with both standard and low-profile brackets and fits in slim-profile desktop builds. HyperX Predator PCIe SSD delivers top-of-the-line performance to match high-performance HyperX memory for consistent branding to keep you at the top of your game.

- > Highest performance speeds with large capacities
- > PCIe interface with multiple form factors
- > One-brand solution for top-of-the-line performance memory and SSD components

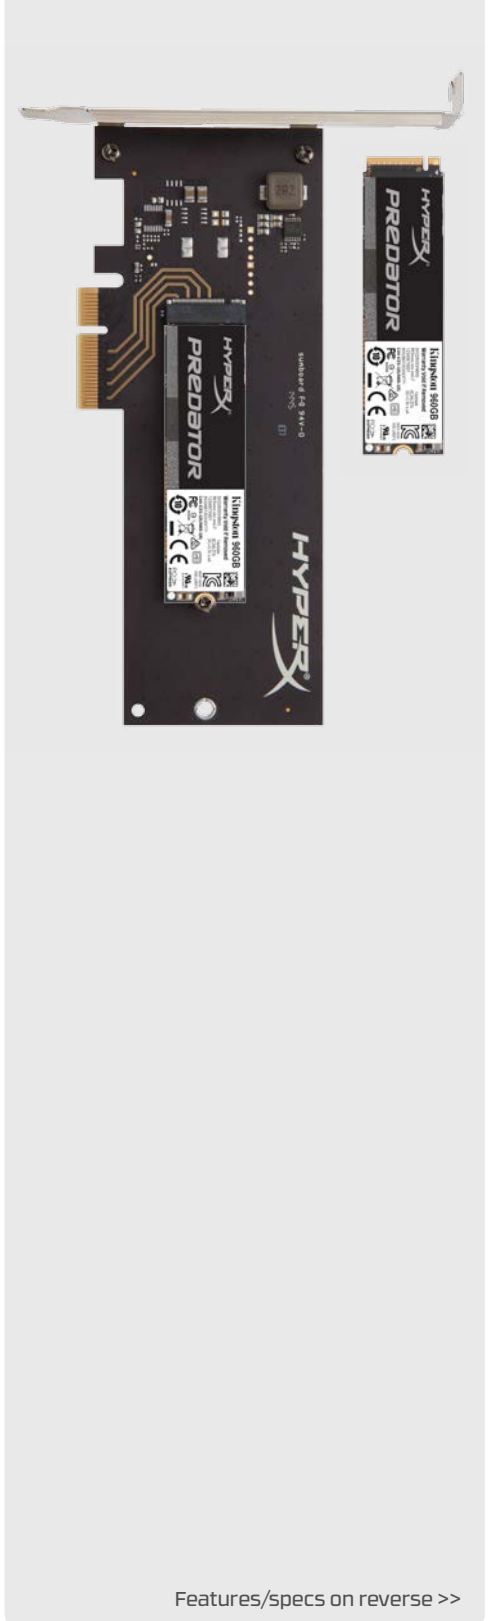

Features/specs on reverse >>

HYPERX

HyperX Predator PCIe SSD

FEATURES/BENEFITS

- > **Fastest HyperX SSD** — Its Marvell controller delivers incredible sequential and random speeds, making Predator PCIe the fastest HyperX SSD.
- > **Multiple capacities** — To suit your exact needs, HyperX Predator PCIe SSD comes in capacities of up to 960GB and can work as a boot drive or a true hard drive replacement.
- > **Supports PCIe** — HyperX Predator PCIe SSD delivers blazing-fast PCIe Gen 2.0 x4 speeds that are much faster than any SATA-based SSD.
- > **Ideal for desktop systems** — This SSD is available in an M.2 form factor with an optional HHHL adapter. Choose the option that best suits your build.

SPECIFICATIONS

- > **Form factor** M.2 2280
- > **Interface** PCIe Gen 2.0 x4
- > **Capacities¹** 240GB, 480GB, 960GB
- > **NAND** MLC
- > **Controller** Marvell 88SS9293
- > **Baseline performance²**
 - Compressible Data Transfer (ATTO)**
 - 240GB — 1400MB/s Read and 600MB/s Write
 - 480GB — 1400MB/s Read and 1000MB/s Write
 - 960GB — 1350MB/s Read and 1000MB/s Write
 - Incompressible Data Transfer (AS-SSD and CrystalDiskMark)**
 - 240GB — 1290MB/s Read and 600MB/s Write
 - 480GB — 1100MB/s Read and 910MB/s Write
 - 960GB — 1300MB/s Read and 1000MB/s Write
 - IOMETER Maximum 4k Read/Write**
 - 240GB — up to 160,000 / up to 119,000 IOPS
 - 480GB — up to 130,000 / up to 118,000 IOPS
 - 960GB — up to 160,000 / up to 126,000 IOPS
 - Random 4k Read/Write**
 - 240GB — up to 120,000 / up to 78,000 IOPS
 - 480GB — up to 117,000 / up to 70,000 IOPS
 - 960GB — up to 111,000 / up to 72,000 IOPS
 - PCMark® Vantage HDD Suite Score**
 - 240GB — 138,000
 - 480GB — 139,000
 - 960GB — 130,000
 - PCMark® 8 Storage Bandwidth**
 - 240GB — 331MB/s
 - 480GB — 336MB/s
 - 960GB — 414MB/s
 - PCMark® 8 Storage Score**
 - 240GB — 5,015
 - 480GB — 5,017
 - 960GB — 5,045
 - Anvil Total Score (Incompressible Workload)**
 - 240GB — 6,500
 - 480GB — 6,700
 - 960GB — 6,800
- > **Power consumption** 1.38W Idle / 1.4W Avg / 1.99W (MAX) Read / 8.25W (MAX) Write
- > **Storage temperature** -40°C~85°C
- > **Operating temperature** 0°C~70°C
- > **Dimensions** 80mm x 22mm x 3.5mm (M.2)
180.98mm x 120.96mm x 21.59mm (with HHHL adapter – standard bracket)
181.29mm x 80.14mm x 23.40mm (with HHHL adapter – low-profile bracket)
- > **Weight** 10g (M.2)
73g (with HHHL adapter – standard bracket)
68g (with HHHL adapter – low-profile bracket)
- > **Vibration operating** 2.17G Peak (7–800Hz)
- > **Vibration non-operating** 20G Peak (10–2000Hz)
- > **Life expectancy** 1 million hours MTBF
- > **Warranty/support** 3-year warranty with free technical support
- > **Total Bytes Written (TBW)³**
 - 240GB — 415TB 1.6 DWPD⁴
 - 480GB — 882TB 1.7 DWPD⁴
 - 960GB — 1600TB 1.8 DWPD⁴



PART NUMBERS

- SHPM2280P2/240G
- SHPM2280P2/480G
- SHPM2280P2/960G
- SHPM2280P2H/240G (with HHHL adapter)
- SHPM2280P2H/480G (with HHHL adapter)
- SHPM2280P2H/960G (with HHHL adapter)

PACKAGE CONTENTS

- M.2 only
 - Hard drive cloning software – download coupon⁵
- M.2 with HHHL adapter
 - Standard & low-profile brackets
 - Hard drive cloning software – download coupon⁵

This SSD is designed for use in desktop and notebook computer workloads, and is not intended for server environments.

1 Some of the listed capacity on a Flash storage device is used for formatting and other functions and is thus not available for data storage. As such, the actual available capacity for data storage is less than what is listed on the products. For more information, go to Kingston's Flash memory Guide at kingston.com/flashguide.

2 Based on "out-of-box performance" using a PCIe 3.0/2.0 motherboard. Speed may vary due to host hardware, software and usage. IOMETER random 4k random read/write is based on 8GB partition.

3 Total Bytes Written (TBW) is derived from the JEDEC Client Workload (JESD219A).

4 Drive Writes Per Day (DWPD)



HyperX is a division of Kingston.

THIS DOCUMENT SUBJECT TO CHANGE WITHOUT NOTICE.
©2016 Kingston Technology Europe Co LLP and Kingston Digital Europe Co LLP, Kingston Court, Brooklands Close, Sunbury-on-Thames, Middlesex, TW16 7EP, England. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. MKD-303.1EN

